




Indirect LED Troffer

Features

- UL And DLC with 5 years limited warranty
- No view of the light source
- transparent optics, controlled up light and down light distributions
- Recessed Luminaire, Fits Standard T-Grid Ceilings



Dimensions

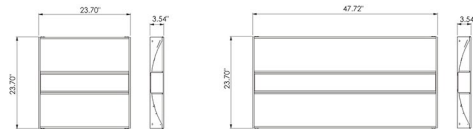

NLTT22-DM-XXX

Size	2x2
Input Power	45W
Input Voltage	100-277V AC
Efficacy	100 lm/w
Luminous Flux	4500 lm
Dimming type	0-10V Dimming
DLC CCT Options	<input type="radio"/> 3500K <input type="radio"/> 4000K <input type="radio"/> 5000K

NLTT24-DM-XXX

Size	2x4
Input Power	60W
Input Voltage	100-277V AC
Efficacy	100 lm/w
Luminous Flux	6000 lm
Dimming type	0-10V Dimming
DLC CCT Options	<input type="radio"/> 3500K <input type="radio"/> 4000K <input type="radio"/> 5000K

Remark: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.