

Thinnest Surfaced Mounted


The unique internal driver makes the panel only 0.68" thick.
Only 0.12" gap between the panel and the dry ceiling if surface mounted installation.




OKT



Traditional

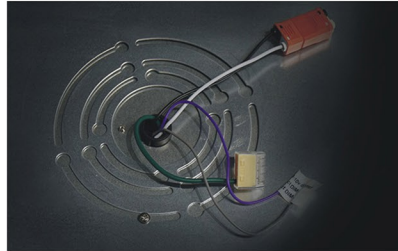

Internal driver and Slotted design can be compatibled with multiple size of junction boxes

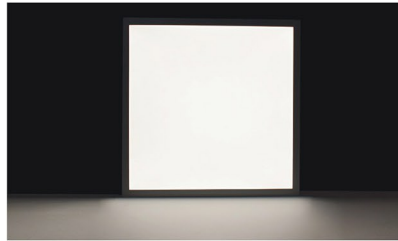

High Efficiency >125lm/w
Get More Savings With Utility Rebates